



[www.coilwindingmachines.eu](http://www.coilwindingmachines.eu)

Tel: +44(0)1684 273164 Fax: +44(0)1684 273171 Email: [enquiry@ingridwest.co.uk](mailto:enquiry@ingridwest.co.uk) by Ingrid West Machinery Ltd

Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.

## Multi Axis Automatic Winding Machine

### RFID CHIP INDUCTOR WINDING.

#### Application:

0603, 0805, 1008 chip sizes and other ferrite-wound products....

#### Main features:

- The wire guide movement can be freely programmed in all 3 axes (X, Y, and Z).
- Built-in welding system to connect start and finish leads.
- Bowl fee ferrite component, Wire cutting on tooling clamp, guide over start pad on ferrite, weld, winding, guide over end pad, weld, cut end wire, remove ferrite, unload - all preformed in a fully automatic way.
- Password function, prevent accidental program change.
- Simplified programming with teach-in programming system using 15" touch screen.
- Easy to change tooling and machine set-up recalled from the onboard computer when changing product.
- Fully CE compliant.

#### Options:

- Load and unload to tape and reel.
- Various tooling can be designed depending on component requirements.
- Customised accessories to suit your application.



We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

**~ Coil winding solutions you can rely on ~**




Working with local partners in the following countries;

Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.



Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.

Main technical specifications		
No. of spindles	1	
Wire size	0.025-0.1 mm	
Spindle speed	3,000 rpm	
Spindle position accuracy	=> 0.1°	
Nozzle movement	0.001 mm	
Spindle control	Winding spindle 3 Axis servo motor	Welding table 2 axis stepper motor
Welding machine	Adjustable parameters, 0-300 / Touch time 3ms	
Control system	Panasonic FP $\Sigma$ system	
Interface	Delta DOP-A57	
Touch screen	15 inch	
Air supply	6 Bar	
Power supply	single phase 220V +-10% 50Hz	
Power consumption	3 KW	
Weight	120 Kg	
Dimensions (cm)	1070(W) x 800(L) x 1880(H) – excluding wire spool stand	

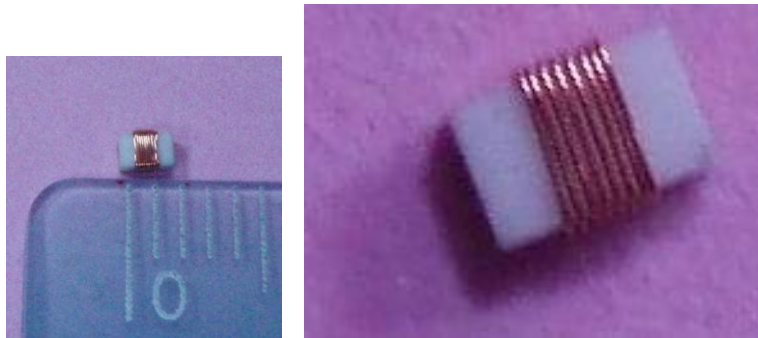

We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

**~ Coil winding solutions you can rely on ~**



Working with local partners in the following countries;

Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.