


## WH 800 SINGLE SPINDLE TRANSFORMER WINDING MACHINE

### SPECIFICATION

<b>Program</b>	Microprocessor controlled, capable of holding 999 program sequences which may be run independently or in selected blocks for compound windings.
<b>Control</b>	Spindle drive - High torque brushless DC induction motor producing a max torque 78.5 Ncm. Traverse - Constant current driven 4-phase stepper motor.
<b>Application</b>	Wire guide is capable of holding four wires at the same time for multiple windings e.g. standard EI transformers.
<b>Package</b>	Includes wire guide, margin tape & cover tape attachments and wire feeder system, with comprehensive manual.
<b>Wire size</b>	0.02 - 1.0 mm
<b>Max pitch</b>	10 mm
<b>Winding Width</b>	110 mm (max)
<b>Bobbin dia</b>	110 mm (max)
<b>Max speed</b>	6000, (optional) 3000 Rpm
<b>Power</b>	AC 230 / 110V ± 10%, 50- 60hz
<b>Dims</b>	760 x 680 x 720 mm
<b>Net Weight</b>	34 kg
<b>CE cert. no.</b>	1377-CI-32017.R1

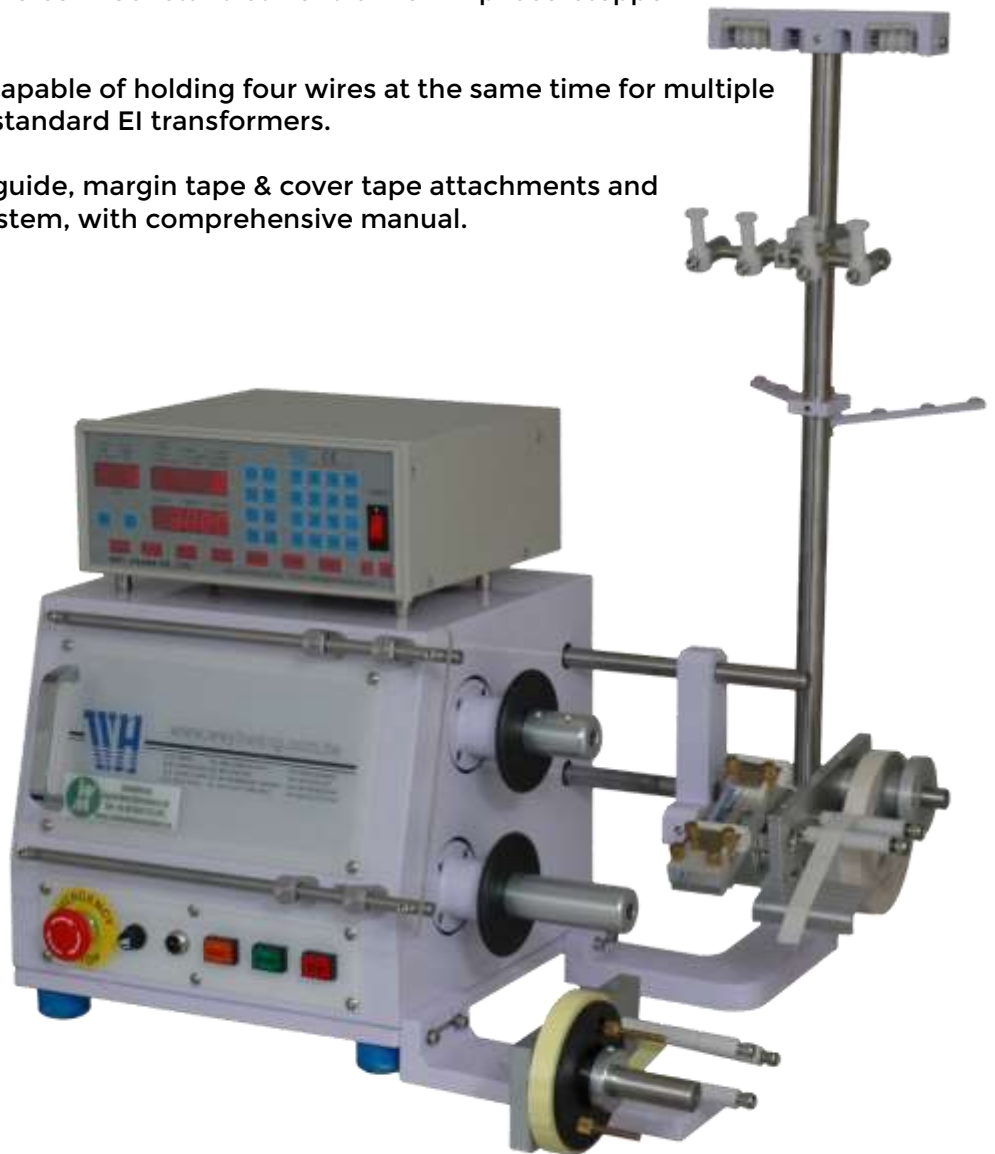

We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

### COIL WINDING SOLUTIONS YOU CAN RELY ON

WORKING WITH LOCAL PARTNERS IN THE FOLLOWING COUNTRIES; Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.

Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.

