


## WH 800i TWO SPINDLE TRANSFORMER WINDING MACHINE.

### SPECIFICATION

<b>Program</b>	Microprocessor controlled, capable of holding 999 program sequences which may be run independently or in selected blocks for compound windings.
<b>Control</b>	Spindle drive - High torque brushless DC induction motor producing a max torque 78.5 Ncm. Traverse - Constant current driven 4-phase stepper motor.
<b>Application</b>	Nozzle type wire guides feed each spindle, these are adjustable so that dual winding may be carried out successfully. Each guide is fed via a tension unit.
<b>Package</b>	Includes 2 x nozzle wire guides, 2 x tension units and cover tape attachment, with comprehensive manual.
<b>Wire size</b>	Typically 0.02 - 0.6 mm (1.0mm in single spindle mode).
<b>Max pitch</b>	10 mm
<b>Winding Width</b>	110 mm (max)
<b>Bobbin dia</b>	110 mm (max)
<b>Max speed</b>	6000, 3000 (optional)
<b>Power</b>	AC 230 / 110V $\pm$ 10%, 50-60hz
<b>Dims</b>	760 x 680 x 720 mm
<b>Net weight</b>	37 kg
<b>CE cert. no.</b>	AE9955093 01

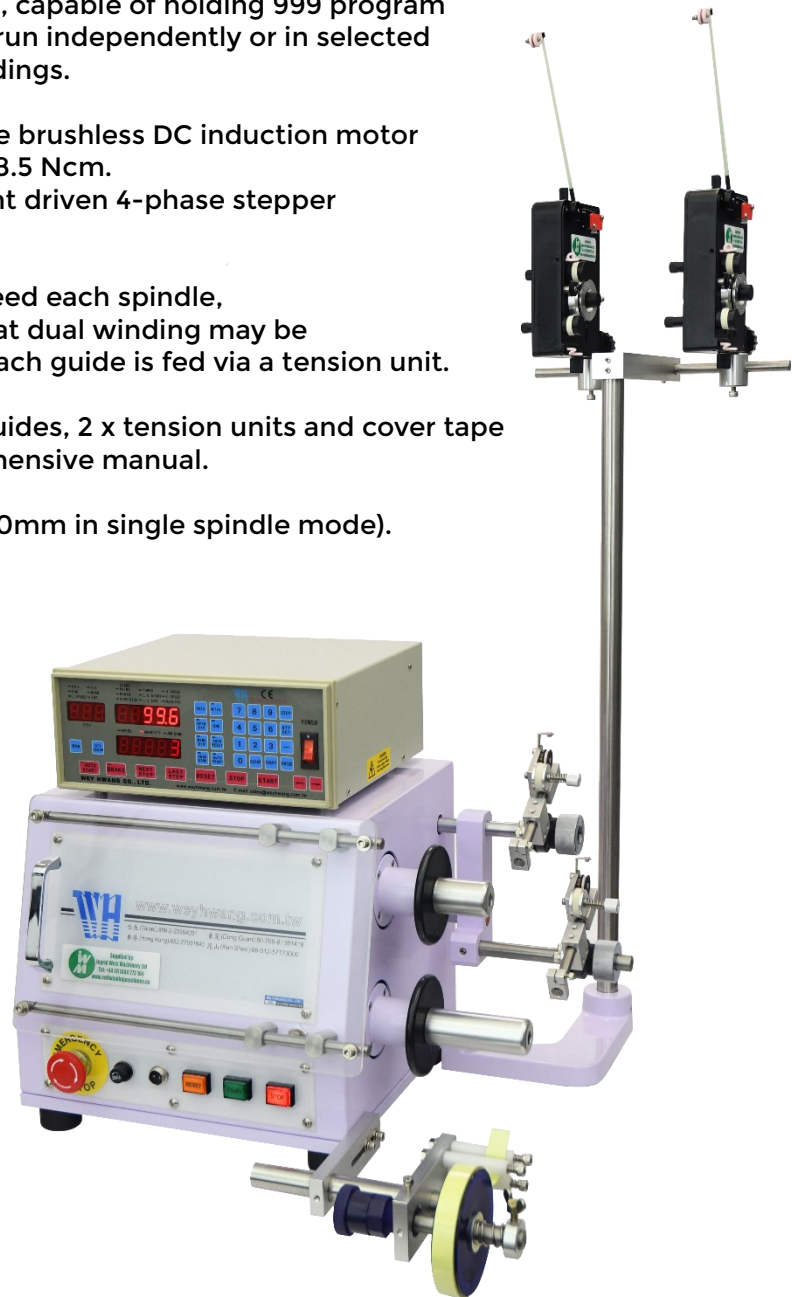

We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

### COIL WINDING SOLUTIONS YOU CAN RELY ON

WORKING WITH LOCAL PARTNERS IN THE FOLLOWING COUNTRIES; Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.

Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.



## TENSIONERS - FINE WIRE, LOW COST

### SPECIFICATION


These mechanical tensioners provide precision control of winding tension for wires in the range from 0.02mm to 2.0 mm.

The arm position provides feedback to the system, adjusting the main friction wheel to regulate and maintain constant tension during the winding cycle.

Felt pads provide pre-tension and remove dust and other debris from the wire.

Ceramic eyelets and roller guides at each point of contact protect insulation from mechanical damage, and guide the wire.

The performance of these units is exceptional given the low cost, providing outstanding value for money.

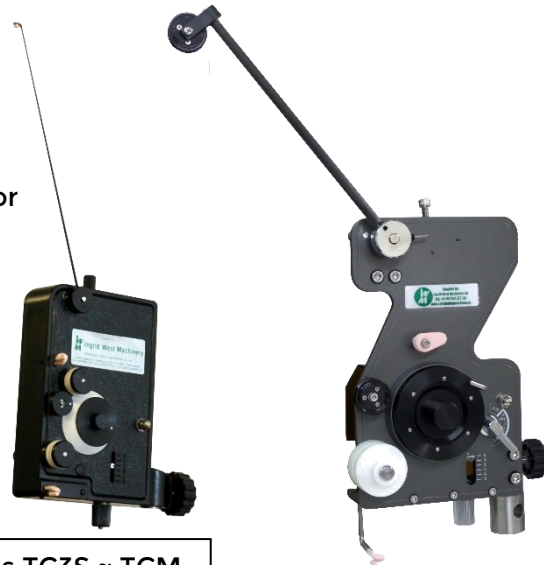

Models TC3S ~ TCM

Model TCL-X / TCLL-X

\* The wire sizes shown are a guide only, for copper magnet wire at recommended "Standard Tension".

The tension required in practical applications may vary considerably.

Model Type	Min Tension (grams)	Max Tension (grams)	Min Wire Gauge (mm) *	Max Wire Gauge (mm) *
TC3S	2	11	0.02	0.04
TCSS-X	7	30	0.03	0.06
TCSS	9	50	0.04	0.08
TCS-E	20	130	0.06	0.13
TCS	40	200	0.08	0.16
TCM	90	500	0.16	0.25
TCL-X	200	2000	0.20	0.60

We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

## COIL WINDING SOLUTIONS YOU CAN RELY ON

WORKING WITH LOCAL PARTNERS IN THE FOLLOWING COUNTRIES; Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.

Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.

