

TENSIONER METERS.

Model No.	Range	Resolution	Tension Units
CX1-1000	23 -454 KG	2.26 KG	N, KG or lb
CX1-2000	45 - 907 KG	4.5 KG	N, KG or lb

Large, easy to read backlit, graphic display with adjustable backlighting and contrast. Data Logging feature included; Capture and view data within a user-defined time window. Select the time window; then select the sampling rate (from 1-100 Hz).



- Active, color changing Bar Graph
- Select Material and Size. Instrument automatically adjusts the calibration
- Minimum and Maximum values



A - Analog Output Option

Analog Output Option for both speed and tension values. 0-5 VDC or 4 - 20 mA with software-definable ending sequences. Provided with 10' cable. Data outputted at 40Hz.

E - RS-232 Serial Output Option

Provided with 10' cable to interface with your receiving device. Select data sampling rate from 1, 2 or 5 Hz.

Order code:- [Model number] + [options] - e.g. CX1-1000-A-E

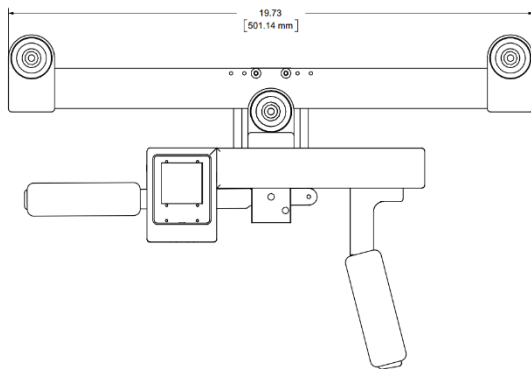

We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

COIL WINDING SOLUTIONS YOU CAN RELY ON

WORKING WITH LOCAL PARTNERS IN THE FOLLOWING COUNTRIES; Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.

Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.